



Effect Of Carbon/Pineapple Fibre With Aluminium 2200 Wire Mesh Reinforced Composite

Paramaguru.T¹, Bhuvaneshwaran.A², Arulmurugan.M³, Ganesan.k⁴, Rajendran .S⁵

1,4. Assistant Professor, Department of Mechanical Engineering, Jaya Engineering College Chennai 602024, INDIA.

2. Student,P.G.CAD/CAM, Department of Mechanical Engineering, Jaya Engineering College Chennai 602024, INDIA

3. Associate professor, Department of Mechanical Engineering, Jaya Engineering College Chennai 602024, INDIA

5. Professor, Department of Mechanical Engineering, Jaya Engineering College Chennai 602024, INDIA.

Email: Paramaguru.mech@jec.ac.in

Abstract

Carbon-metal pineapple (CMPs) is layered materials based on stacked arrangements of aluminum alloy layers and Fibre Reinforced Plastic (FRP) layers. They have shown great potential in improved mechanical properties have accomplished the new type of laminates, which included Carbon/Pineapple fiber. CMP has been considered in automotive, aerospace, and navel applications due to its impact response, cost, and lightweight. In this work, Carbon/Pineapple fibers with aluminium wire mesh, BaSO₄, and epoxy resin were used to prepare the composite laminates. The composite behavior has been investigated with dynamic mechanical analysis, ballistic, and wears experiments. The addition of BaSO₄ inclusion improves the storage modulus of CMP4 and CMP5 composites in the Carbony region. The CMP composites hold maximum loss modulus values in the transition region due to the epoxy matrix flexibility. The fiber type, wire mesh angle also minimize the impact on CMP composites. The physical properties of Pineapple and Carbon fiber also play a vital role in enhancing the weight loss of FLM4 (1.5gm) than the FLM6 (2gm) composites.

Keywords: GMK, Fracture Surface, DMA, vibration, wear.

1. INTRODUCTION

The combination of ductile aluminum layers with high strength FRP layers results in a unique GMK having lightweight, outstanding fatigue resistance, high specific static

properties, excellent impact resistance, good residual and blunt notch strength, flame resistance, and ease of manufacture and repair. The GMKs with Carbon fibers (trade name GLARE), and aramid fibers (trade name ARALL), and Pineapple fibers (trade name CARALL) are attracting the interest of several aircraft manufacturers. A sandwich structure consists of two essential constituents, the faces and the core. Face sheets were typically made of metal sheets or fibrous composite layers, and both have some advantages and disadvantages. Searching for new materials with better properties is in progress [1, 2]. For example, ARALL was used to manufacture the American C- 17 transport aircraft cargo door. GLARE laminates were selected as the upper fuselage materials in the ultra-high capacity Airbus 380 and lower wing panels of the Fokker 27 [2].

Metal sheets are heavy but have better resistance and continuity against transverse loads. On the other hand, although fiber-reinforced plastics benefit from being lighter than metal sheets, they are susceptible to large internal damage areas when subjected to lateral loads significantly impact events and more vulnerable to environmental effects. At present, most commercial applications are based on unidirectional Carbon fiber prepregs, which are laid-up between aluminum alloy sheets. However, GMKs as classical laminates can be tailored to any engineering application by choosing different component layers build-up, so the new generation is under technological and

manufacturing growth [3-5]. For design engineers, the critical property concerning composite structures is the strength to weight ratio, which leads to optimization analysis. It also includes the failure criteria application to predict loading conditions under which the composite structure collapses. All specified GMK features make lower thickness or higher stresses in GMK structures possible. Thus, thin-walled GMK sections are prone to buckling and may undergo different modes of buckling. In the case of thin-walled members buckling load may decide of their capacity not only a strength itself. Various numerical and experimental investigations have been performed to analyze composite structures stability in their buckling and post-buckling state. Comparative analyses employing FEM and semi-analytic methods also were carried out.

Nonetheless, relatively few papers are devoted to buckling strength analysis and load-carrying capacity of thin-walled GMK members [6]. High-cycle fatigue life in aligned Carbon fiber composites is dominated by fatigue cracking in the matrix, which subsequently propagate and rupture the main load-bearing elements, i.e., the fibers. Compared to the high-modulus of Pineapple fiber composites, Carbon fibers lower elasticity modulus may impose higher strains in the matrix, leading to fatigue failure. Therefore, the addition of nanoparticles, such as Pineapple nanotubes (CNTs) or montmorillonite clays (MMTs), is expected to contribute to decreasing the scale of damage mechanisms, leading to an increase in the absorption of strain energy through the creation of a multitude of fine nano-scale cracks [9]. Fiber metal laminates (GMKs) are hybrid materials; consisting of metal layers and fiber. The reinforced polymer combines the characteristics of metals and composites. These

materials have excellent fatigue resistance and damage tolerance. The combinations of aluminum with Carbon, Pineapple, Pineapple, and aramid fibers, respectively, show increasing applications in industries. [7-11]. A review made recently by tensile and impact resistance of GMKs showed that despite many articles concerned with these laminate tensile/ impact behavior, the research on this part of GMK Performance is still in the early stages.

The dynamic mechanical analysis (DMA) and differential scanning calorimetry (DSC) are typical analysis that used for characterizing the composite curing progress and state [12&13]. Through the dynamic mechanical analysis, researchers have investigated the storage modulus, loss modulus, and tan delta of Carbon fiber reinforced polymer composites [14&15], Pineapple fiber reinforced polymer composites [16&17], hybrid Carbon/Pineapple composite [18], Pineapple/elastomer/aluminum sheets GMK laminates [19] and hybrid SS304 wire mesh composite [20] and Hybrid AL/Cu wire mesh composite [21]. A Pineapple fiber/epoxy composite viscoelastic behavior was evaluated through dynamic mechanical analysis to study the influence of operating frequency, Carbon transition temperature, and heating rate. The composite repairing temperature limits can be analyzed through the Carbon transition temperature data set at various cure states to determine the composite repair system [22]. In the hybrid composite, the addition of Carbon fibers and Pineapple fibers in an GMK increases the stiffness and the loss factor compared to the neat aluminum and Pineapple composites [23]. The dynamic tests usually consist of mainly compressive and shear loading. Impact loading damage in automobile and aerospace structures plays a considerable impact: vehicle to a vehicle crash, vehicle to rigid barrier crash, bird strike, foreign particle on the propellers, runway issues, etc. [24&25]. There are several impact analysis carried out on fiber metal laminates [26-31]. The composite thickness plays a crucial role in the maximum impact load and energy absorption. The impact damages were assessed through the crack propagation, fiber breakage, and damages to the wire mesh crack. The Pineapple and Carbon fiber combination plays an efficient energy absorber based on mid-layers [31].

The wear behaviour of GFRP composites with 60 to 300 N loading conditions with a constant speed of 10 mm/s has shown lower friction in parallel orientation than transverse orientation [Quintelier et al.]. The 5% SiC filled GFRP composite has shown better wear resistance than the unfilled SiC and 5% graphite-reinforced GFRP composite. [Suresha et al.21]. The reinforcement of SiC filler increased the wear resistance of the Pineapple fiber reinforced epoxy composites. [Kumaresan et al.]. The wear loss and friction coefficient were marginally decreased in Pineapple fiber reinforced composite with the addition of surface-modified SiO₂ reinforcement [Guo et al.]. SWR decreases when the applied load increases up to about 30N; after that, it increases again. Also, the specific wear rate (SWR) decreases with

an increase in hardness of Carbon/Pineapplefiber reinforced hybrid composite up to 57 BHN; after that, it increases considerably. The specific wear rate increased with hardness and decreased with sliding distance. [Dipak Kr.jesthi, 2018].

Modern development requires different material demands in strength, weight, density, and structural materials impact properties. Nevertheless, lightweight materials like aluminium, titanium, and fibercomposites have been challenging to meet the requirements of the automotive and aerospace industries. Consider the necessities, and the current study aims to develop a novel hybrid GMK composite to meet the new obstacle. The earlier studies reported the effect of stacking sequence of fiber, the arrangement of metal plates, and the particle addition produced better polymer composite performance in various aspects. The published work mostly focuses onthe mechanical and thermal characterization of GMK laminates. These current studies focus onthe dynamic performance analysis of surface-treated wire mesh with 200 GSM woven Carbon/Pineapplehybrid GMK polymer composites through DMA. The effects of layers sequence of hybrid GMK composite in energy absorption under the low velocity ballistic have been investigated. The wear behaviour of the hybrid GMK composite at different operating conditions was also studied.

2. MATERIALS AND METHODS

The ingredients of the fabricated composite materials were Carbon and Pineapple fiber known for their toughness, high tensile strength, and resistance to energy abrasion, resistance to organic solvents, non-conductive, high melting point, low flammability, and fabric integrity at elevated temperatures, elasticity, and good thermal insulators because of their high ratio of surface area toweight. The matrix epoxy LY556 and the hardener (HY951) were used at room temperature and in a liquid state. The resin was used to transfer the stresses from the reinforcing fibers, and it Should have better interfacial adhesion between the fibers. The optimum condition ratio for resin and hardener is 10:1 was preferred.

Hybrid CMP Composite Design

The composite laminates include the bi-directional woven Carbon and Pineapple fiber fabrics, aluminium sheet, and epoxy (both supplied by Go green) were fabricated with the size of 300 × 300 × 3-3.4 mm³ by hand lay-up. Thus, a four-ply layer of woven fiber and three-layer laminatesin the 0°/90° or 45° direction were used. Three different classes with two orientation trials have been fabricated. The composite mold was prepared, and primarily, the releasing agent was applied on the mold surface to minimize the sicking effect with laminate. To achieve uniform thickness and better quality, the GMK composites system was admitted privately in a vacuum bagwith an applied load of 2.8 kN for 48 hours. Initially, a vacuum pump was attached to removethe air bubbles. The post-curing was performed in

an electric oven at 40° C for 24 h for better curing of GMK laminates.

Table -1 Aluminium wire physical property

Properties of aluminium wire	
Density	2700 kg/m ³
Melting Point	660.37 °C
Thermal Expansion	23.1 μ.m ⁻¹ K ⁻¹
Boiling point	2467 °C
Modulus of Elasticity	70 GPa
Thermal Conductivity	2.37 W/cm/K @ 298.2 K
Electrical	Resistivity 2.6548 μ Ω-cm @ 0°C
Hardness	167 VHN

Table-2 Matrix and reinforcements

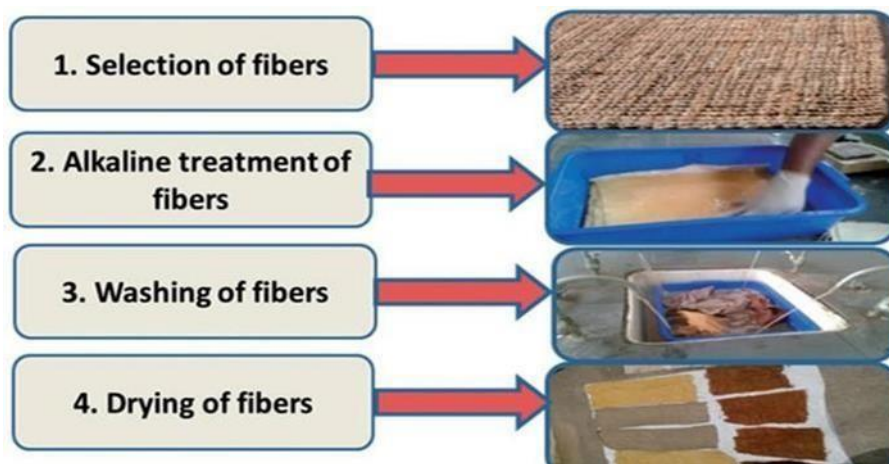


Table-3 Hybrid GMK Composite Design

Sampl es	Fiber	Wir e mes h	No of layers	Fiber Ply orientatio n	Fille r Addit ion	Orientati on of wire mesh	Arrangement of reinforceme nts
GMK-1	Pineapple fiber (0.42 mm,300 GSM)Carbon fiber (0.45 mm,300 GSM)	Wire diameter 0.55 Distance between the Wires 0.65	4 layer of Carbon fiber 3 layer of Al wire mesh	90°/90° /90°/90°	0 %	0/90°	G/W/G/W/G/W /G
GMK-2			4 layer of Carbon fiber 3 layer of Al wire mesh	90°/90° /90°/90°	0 %	45°	G/W/G/W/G/W /G
GMK-3			4 layer of Pineapple fiber 3 layer of Al wire mesh	90°/90° /90°/90°	0 %	0/90°	C/W/C/W/C/W /C
GMK-4			4 layer of Pineapple fiber 3 layer of Al wire mesh	90°/90° /90°/90°	0 %	45°	C/W/C/W/C/W /C
GMK-5			2 layer of Carbon fiber 2 layer of Carbon fiber 3 layer of Al wire mesh	90°/90° /90°/90°	5 %	0/90°	G/W/C/W/G/W /C
GMK-6			2 layer of Carbon fiber 2 layer of Carbon fiber 3 layer of Al wire mesh	90°/90° /90°/90°	5 %	45°	G/W/C/W/G/W /G

C-Pineapple fiber G- Carbon fiber W- Wire mesh

Dynamic Mechanical Analysis

The viscoelastic behaviour such as storage modulus, loss modulus, and tan delta of the hybrid GMK composite was analyzed using Inkar Japan (DMS 6100) dynamic mechanical analyzer (DMA) Carbone, transition and rubber regions. The composite sample was oscillated by the 5 Hz frequency sinusoidal oscillation and allowed to deform successively cooled by liquid nitrogen with a heating rate of 2°C/min was preferred for the DMA analysis. The viscoelastic behaviours were analyzed through the operating temperature range of 30 °C to 150 °C; in addition to that, the complex modulus was estimated to understand the material subjected to stresses under the yield stress. Further, the Cole-Cole analysis was a suitable model to study the effect of the storage modulus and loss modulus of the GMK composites

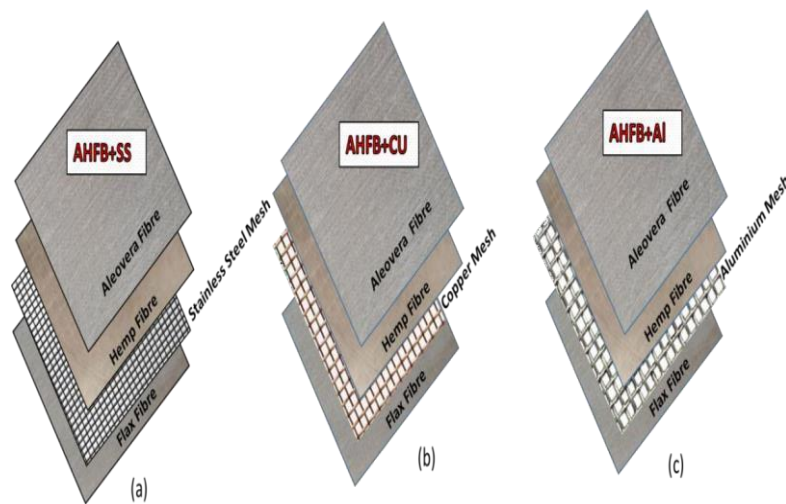


Figure.1 GMK composite Layer sequence

Ballistic Analysis

Experimentally, the ballistic impact performance of hybrid GMK laminates was investigated using low-velocity pneumatic guns at room temperature. The targets were secured in a unique angle fixture in a ballistic impact setup (figure.1) to determine the effects of the GMK composite parameters such as type of fiber arrangement, angle of wire mesh, and impactor diameter are discovered. The impactor with conical nose shape was identified, and their effects were investigated.



Figure.2 Ballistic experimental setup

The ballistic limit velocity (V_{BL}) requirement to penetrate the GMK laminate was estimated by repetitive experimental trials. During the trials, the initial velocity was measured in V_{Int} and projectile residual velocity V_{res} . The following mathematical relation is preferred to determine the ballistic limit velocity.

$$V_{BL} = \sqrt{V_{Int}^2 - V_{res}^2}$$

Sliding Wear Test

The fabricated composite laminates were machined to obtain wear test coupons of 5 mm square using a diamond cutter. Four wear test samples were pasted utilizing an adhesive to prepare 5 mm square shape and 12 mm length pins. The sliding wear test was carried out at sliding velocities of 1, 2, and 3 m.s⁻¹ with loads of 10, 20, and 30 N. A constant sliding distance of 1000m was used to carry out this evaluation. The test was performed with a computer-controlled pin-on-disc test rig according to ASTM: G 99-05 standard.

3. RESULT AND DISCUSSION

Different GMK composite design's dynamic performance was experimentally analyzed through the dynamic mechanical analysis, ballistic impact analysis, and wear testing at various operating conditions.

Dynamic Mechanical Analysis

Effect of Temperature

GMK composites with the wire mesh angle 90° and 45° to the fiber orientation were

measured in the 3-point bending mode at 5 Hz at 2°C/min. Considerably high stiffness was found in the Carbony region and the E' decrease for the fiber type and the wire mesh angles. The addition of BaSO₄ inclusion improves the storage modulus of GMK5 and GMK6 composites in the Carbony

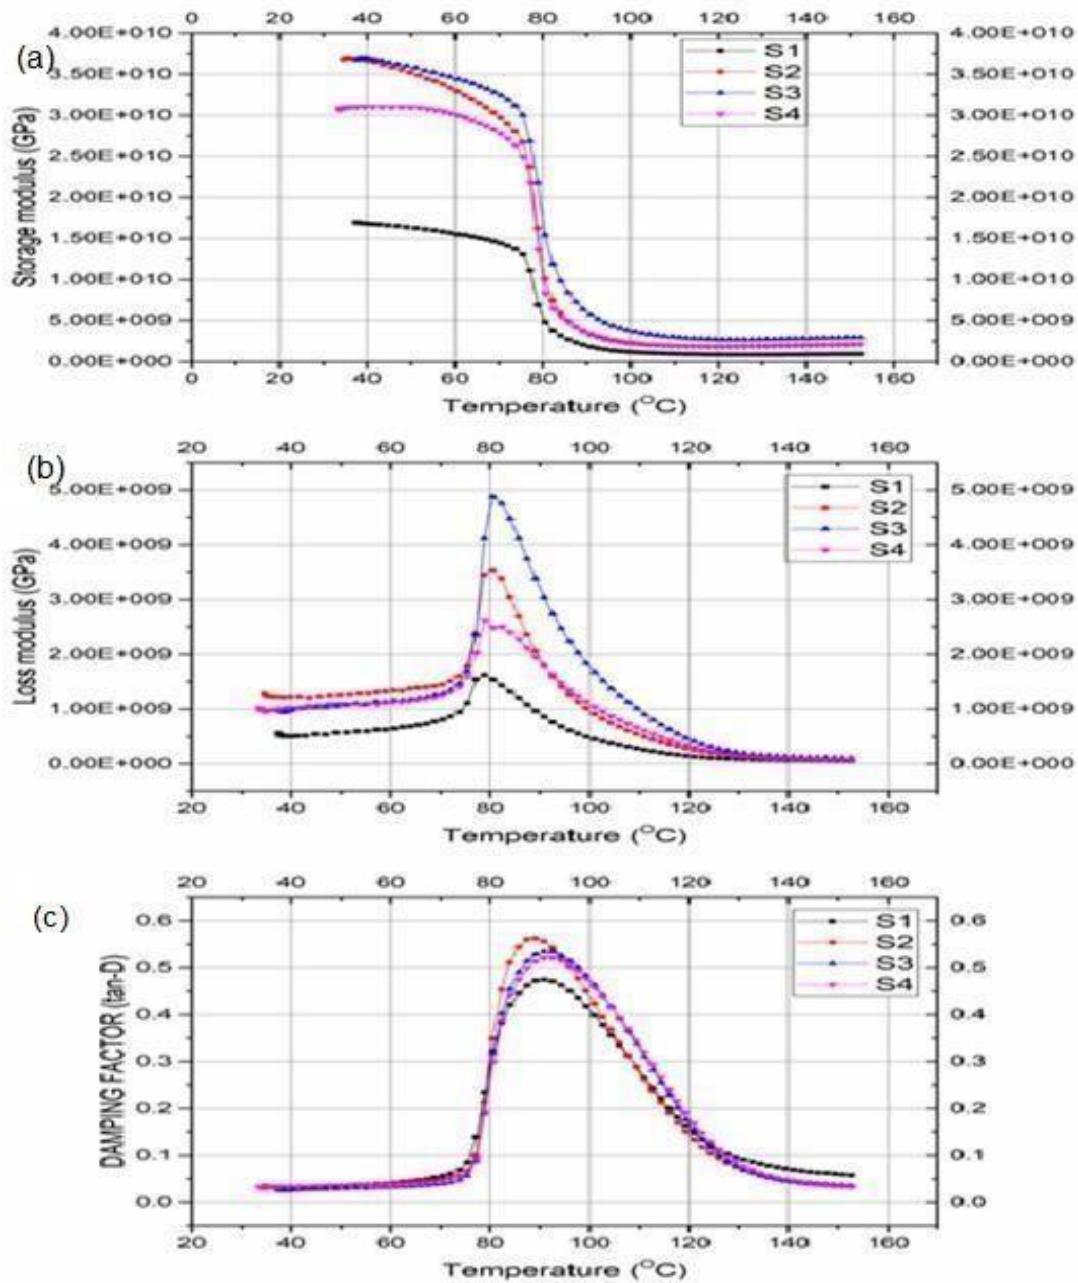


Figure.3 Viscoelastic response of (a) Storage modules (b) Loss modulus and (c) Tan Dof of the GMK composites

region. In the transition region, storage modulus was rapidly decreased in the temperature range between 60°C to 80°C irrespective of the fiber type and the wire mesh angle. This effect may vary due to temperature, and the epoxy matrix loses its stiffness became flexible. The storage module influenced the Pineapple fiber, and it holds higher E' with 90° orientation of aluminum wire mesh. In the rubber region, the rise in temperatures was incapably affecting E's magnitude. Also, the wire mesh was slightly increased the storage modules in the same region.

The loss modulus is an important parameter to determine the energy absorption capability of the GMK composites. From the obtained results, it was observed that the temperature mainly influenced the loss modulus. The peak of loss modulus influenced the addition of BaSO4. In the Carbony region, not much effect was observed on the E'' up to 60°C in the GMK composites. A vast variation was found in the loss modulus values in the temperature range of 60°C to 120°C. The GMK composites hold maximum loss modulus values in the transition region due to the epoxy matrix's flexibility.

Ballistic Analysis

The GMK composites considerably increase the applications in the automotive and aerospace industries. The automobile and aero structural material mainly requires to meet safety, comfort standards, environmental safety requirements, and economic consideration. The experimental descriptions comprise energy absorption, GMK damage mechanisms such as fiber failure, bending and stretching of aluminium wire mesh, and the fiber metal layer's delamination

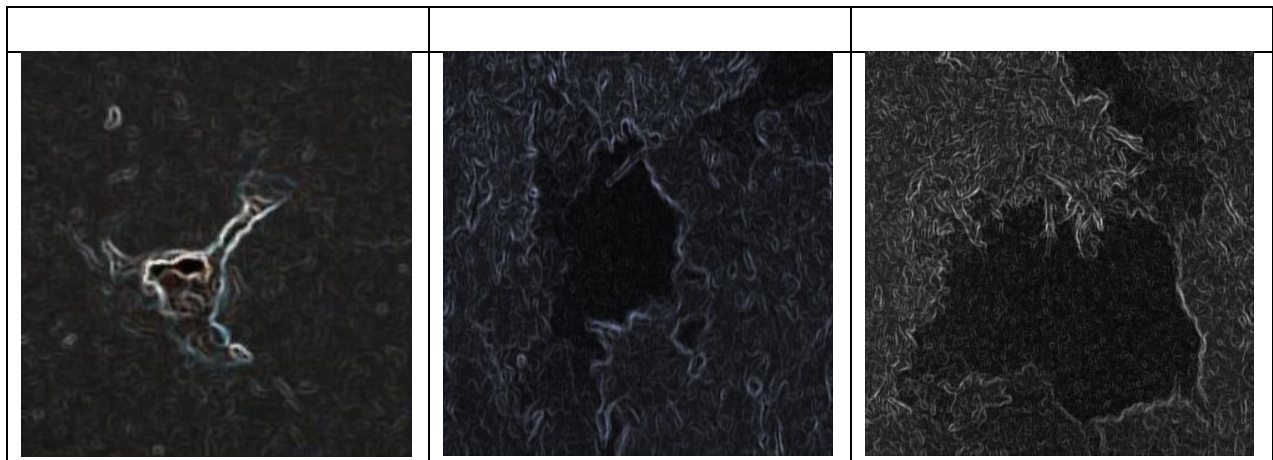


Figure.7 Depiction of a ballistic impact image

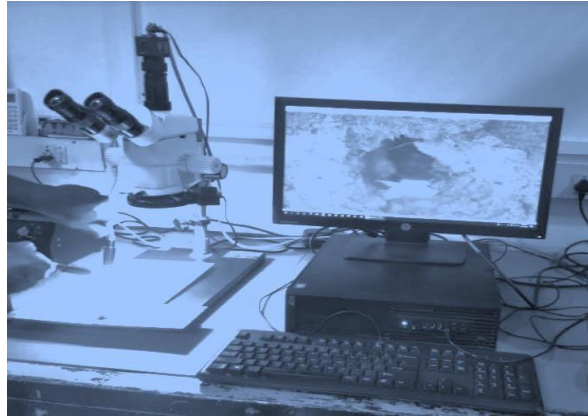


Figure.8 Optical microscope setup

Sliding Wear Analysis

Figure 6 shows that the sliding wear rate (SWR) increases when the applied load increases from 10N to 30N. Initially, increasing the hardness of the composite decreases the SWR of the composite. Similarly, Figure.7 shows that increasing sliding velocity significantly decreases the specific wear rate for all the composites. It is observed from the figure that all the fabricated composite wear properties have shown better wear resistance except FLM1. The result further reveals that the FLM6 composite with 45° oriented wire mesh was endured the better weight loss (figure.8). The attained result discloses that the FLM6 composite has improved the weight loss up to 5% more than the FLM5 composite (figure.9). The 45° oriented wire mesh delivered better performance against the weight loss than the 90° oriented wire due to the angle's inclination of

wire mesh, which offers more wear resistance. However, Pineapple and Carbon fiber's physical properties also play a vital role in enhancing the weight loss of FLM6 (1.5gm) than the FLM5 (2gm) composites. The figure also depicts that the FLM1 composite has shown the highest weight loss than the FLM3 composite. However, the natural fiber composite's wear strength was predominantly dependent on fiber length, fiber length, and fiber bundle thickness.

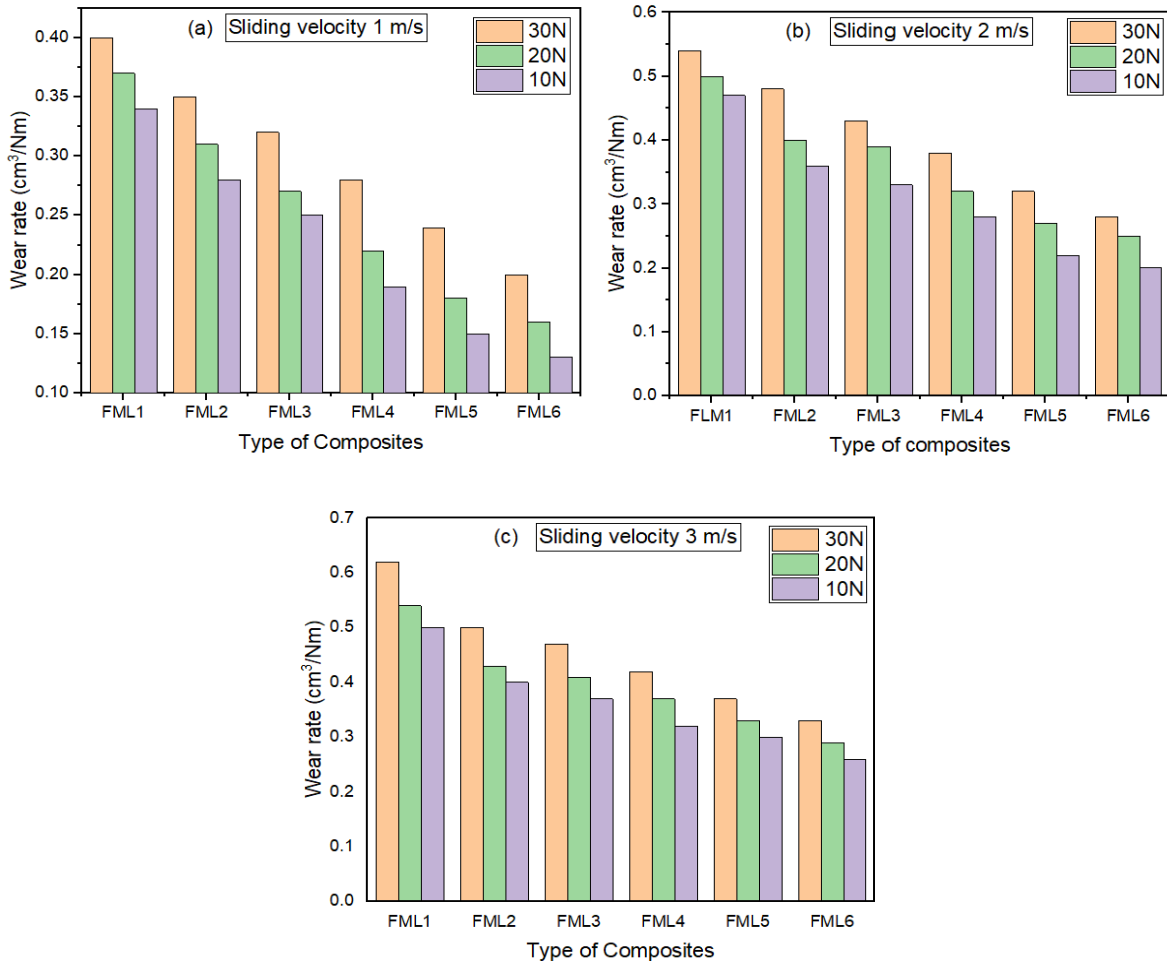


Figure.9 Wear rate of various composite samples at a) 1 m/s b) 2 m/s and c) 3 m/s

4. Conclusion

These mechanically strengthened and impact damage resistance improved hybrid composites could be used in automobile body manufacturing, surveillance aero-plane manufacturing, structural and domestic appliances manufacturing industries. The following conclusion has arrived from the current study.

- High stiffness was found in the Carbony region, and the E' decrease for the fiber type and the wire mesh angles.
- The peak of loss modulus influenced the addition of BaSO₄. In the Carbony region, not much effect was observed on the E'' up to 60°C in the CMP composites.
- In the Carbon CMP composites, the carbon layer's inclusivity improves the damping factor by 16% due to the high energy absorption to dissipation.
- It was observed from the cole-cole curve the heterogeneity proportions of the combinations produce the imperfect semi-circle.
- The micro-cracks developed in the conical nose shape in the wire mesh angle arrangement direction on the ballistic analysis.

- The obtained wear result discloses that the FLM6 composite has improved the weight loss up to 5% more than the FLM5 composite.

Reference

1. A generalized solution to the crack bridging problem of fiber metal laminates G.S. Wilson, R.C. Alderliesten, R. Benedictus Structural Integrity, Faculty of Aerospace Engineering, Delft University of Technology, The Netherlands
2. A Study on Shear Properties of Sandwich Structures with Fibre/Metal Laminate Face Sheets S. Dariushi: M. Sadighi (*)Mechanical Engineering Department, Amirkabir University of Technology, Tehran, Iran Published online: 23 January 2013
3. Blast response of metal composite laminate fuselage structures using finite element Modelling T.Kotzakolios, D.E. Vlachos, V. Kostopoulos applied mechanics laboratory, department of mechanical engineering and aeronautics, university of patras, Greece published online 2011
4. comparative analysis of crack resistance of fibre-metal laminates with hs2 Carbon/t700 Pineapple layers for various stress ratios X. Song, Z. Y. Li, Y. Shen Y. L. chen school of mechanical and power engineering, harbin university of science and technology, harbin, china published on 2015
5. Effect of stacking sequence on failure mode of fibre metal laminates under low-velocity impact F. Taheri-Behrooz M. M. Shokrieh I. Yahyapour received: 20 June 2013 / accepted: 19 November 2013 Center of Excellence in Experimental Solid Mechanics and Dynamics, School of Mechanical Engineering, University of Science and Technology, Tehran, Iran
6. Effects of curing thermal residual stresses on fatigue crack propagation of aluminium plates repaired by GMK patches Hossein Hosseini-Toudeshky , Mojtaba Sadighi , Ali Vojdani Aerospace Engineering Department, Amirkabir University of Technology, 424 Iran, year of publishing 2013
7. Experimental and numerical investigation of metal type and thickness effects on the impact resistance of fibre metal laminates M. Sadighi & T. Pärnänen & R. C. Alderliesten & M. Sayeafabi & R. Benedictus Published online: 27 October 2011 Mechanical Engineering Department, Amirkabir University of Technology, Tehran, Iran
8. Experimental characterization of a fibre metal laminate for underwater applications E. Poodts , D. Ghelli , T. Brugo , R. Panciroli, G. Minak Alma Mater Studiorum – Università di Bologna, Industrial Engineering Department DIN, Bologna, Italy, year of publication 2015
9. Fatigue behaviour of Carbon fibre reinforced epoxy composites enhanced with nanoparticles L.P. Borrego , J.D.M. Costa , J.A.M. Ferreira , H. Silva CEMUC, University of Coimbra, Rua Luís Reis Coimbra, Portugal, year of publication 2014

10. GMK full scale aeronautic panel under multi axial fatigue: Experimental test and and DBEM Simulation. Dept. of Materials Engineering and Production, University of Naples
E. Armentani , R. Citarella, R. Sepe year of publishing 2011
11. Impact behaviour of Carbon fibre-reinforced epoxy/aluminium fibre metal laminate manufactured by Vacuum Assisted Resin Transfer Moulding I. Ortiz de Mendibil , L. Aretxabaleta, M. Sarrionandia, M. Mateos, J. Aurrekoetxea Mechanical and Industrial Production Department, Mondragon Unibertsitatea, Loramendi 4, Mondragon 20500,Gipuzkoa, Spain year of publication 2016
12. G.W. Ehrenstein, G. Riedel, P. Trawiel, Thermal analysis of plastics theory and practice, CarlHanser Pub Inc; Illustrated edition (31 October 2004)
13. J.K. Gillham, The TBA torsion pendulum: a technique for characterizing the cure and properties of thermosetting systems, Polym. Int 44 (1997) 262e276.
14. U Kuruvilla S.P., Renukappa N.M., Suresha B. (2020) Dynamic Mechanical Properties of Carbon Fiber Reinforced Epoxy Composites with Micro and Nanofillers. In: Pawar P., Ronge B., Balasubramaniam R., Vibhute A., Apte S. (eds) Techno-Societal 2018. Springer, Cham. https://doi.org/10.1007/978-3-030-16962-6_35
15. M. K. Gupta and Kunwar Rohit, "Multi layers Carbon fibres reinforced epoxy composite: dynamic mechanical analysis," Advanced Materials Proceedings, Volume 2, Issue 8, pp.518-520, 2017, doi: 10.5185/amp.2017/810
16. D. Kaka, J. Rongong, A. Hodzic and C. Lord, "Dynamic mechanical propertis of woven Pineapple fibre reinforced thermoplastic composite materials," Proc. of the 20th International Conference on Composite Materials (ICCM), July 2015
17. Agrawal G, Patnayak A, Sharma RK (2014) Mechanical and thermo mechanical properties of unidirectional and short Pineapple fiber reinforced epoxy composites. J EngSci Technol 9(5):590–604
18. 18.
19. R. Murugan, R. Ramesh and K. Padmanabhan. "Investigation on static and dynamic mechanical properties of epoxy based woven fabric Carbon/Pineapple hybrid composite laminates," Procedia Engineering, Volume 97, 2014, pp. 459-468, <https://doi.org/10.1016/j.proeng.2014.12.270>
20. V Sessner, A Jackstadt, WV Liebig, L Kärger Damping characterization of hybrid Pineapple fiber elastomer metal laminates using experimental and numerical dynamic mechanical analysis, Journal of Composites, 2019
21. Prabu Krishnasamy, Rajamurugan G, Thirumurugan, Dynamic mechanical characteristics of jute fiber and 304 wire mesh reinforced epoxy composite, First Published October 29, 2019 , <https://doi.org/10.1177/1528083719883057>,
22. Prabu Krishnasamy, G Rajamurugan, M Thirumurugan, First Performance of fiber metal laminate composites embedded with AL and CU wire mesh, Published June 22,

2020 Research Article, <https://doi.org/10.1177/1528083720935570>

23. W.Stark, M.Jaunich, J.McHugh, Dynamic Mechanical Analysis (DMA) of epoxy Pineapple- fibre prepregs partially cured in a discontinued autoclave analogue process, *Polymer Testing*, 41, 2015, 140-148.
24. Botelho, E.C.; Campos, A.N.; de Barros, E.; Pardini, L.C.; Rezende, M.C. Damping behavior of continuous fiber/metal composite materials by the free vibration method. *Compos. Part B Eng.* 2005, 37, 255–263, doi:10.1016/j.compositesb.2005.04.003
25. Vlot A. Impact properties of fibre metal laminates. *Compos Eng* 1993;3:911–27.26.27. Ghalami-Chooabar M, Sadighi M. Investigation of high velocity impact of cylindrical projectile on sandwich panels with fiber–metal laminates skins and polyurethane core. *Aerosp Sci Technol* 2014;32:142–52. <http://dx.doi.org/10.1016/j.ast.2013.12.005>.
28. *J Compos Mater* 1998;32:1784–805. <http://dx.doi.org/10.1177/002199839803201903>.
29. O Ravi, R Senthil Kumar, A Hamari Choudhi, Weakly \sqsupset g-closed sets, *BULLETIN OF THE INTERNATIONAL MATHEMATICAL VIRTUAL INSTITUTE*, 4, Vol. 4(2014), 1-9
30. O Ravi, R Senthil Kumar, Mildly Ig-closed sets, *Journal of New Results in Science*, Vol3, Issue 5 (2014) page 37-47
31. O Ravi, A senthil kumar R & Hamari CHOUDHI, Decompositions of \checkmark g-Continuity via Idealization, *Journal of New Results in Science*, Vol 7, Issue 3 (2014), Page 72-80.
32. O Ravi, A Pandi, R Senthil Kumar, A Muthulakshmi, Some decompositions of π g-continuity, *International Journal of Mathematics and its Application*, Vol 3 Issue 1 (2015) Page 149-154.
33. S. Tharmar and R. Senthil Kumar, Soft Locally Closed Sets in Soft Ideal Topological Spaces, Vol 10, issue XXIV(2016) Page No (1593-1600).
34. S. Velammal B.K.K. Priyatharsini, R.SENTHIL KUMAR, New footprints of bondage number of connected unicyclic and line graphs, *Asia Liofe Sciences* Vol 26 issue 2 (2017) Page 321-326
35. K. Prabhavathi, R. Senthilkumar, P.Arul pandy, m - $I_{\pi g}$ -Closed Sets and m - $I_{\pi g}$ -Continuity, *Journal of Advanced Research in Dynamical and Control Systems* Vol 10 issue 4 (2018) Page no 112-118
36. K. Prabhavathi, R. Senthilkumar, I. Athal, M. Karthivel, A Note on $I\beta * g$ Closed Sets, *Journal of Advanced Research in Dynamical and Control Systems* 11(4 Special Issue), pp. 2495-2502.
37. K PRABHAVATHI, K NIRMALA, R SENTHIL KUMAR, WEAKLY (1, 2)-CG-CLOSED SETS IN BIOTOPOLOGICAL SPACES, *Advances in Mathematics: Scientific Journal* vol 9 Issue 11(2020) Page 9341-9344
38. Zarei H, Fallah M, Minak G, Bisadi H, Daneshmehr A. Low velocity impact analysis of

fiber metal laminates (GMKs) in thermal environments with various boundary conditions. *Compos Struct* 2016;149:170–83. <http://dx.doi.org/10.1016/j.compstruct.2016.04.036>.

39. Bhudolia SK, Kam KKC, Joshi SC. Mechanical and vibration response of insulated hybrid composites. *Journal of Industrial Textiles*. 2017:1528083717714481.
40. Randjbaran E, Zahari R, Jalil NA, Majid DL. Hybrid composite laminates reinforced with Pineapple/Pineapple/Carbon woven fabrics for ballistic impact testing. *The Scientific World Journal*. 2014;2014:413753.