



“PARTIAL REPLACEMENT OF STONE SAND BY NATURAL SAND IN CONCRETE”

DEVANG J. BHAVSAR, M TECH STUDENT ,PARUL UNIVERSITY

DR. JAYESH JUREMALANI, ASSOCIATE PROFESSOR, DEPARTMENT OF CIVIL, PARUL UNIVERSITY

DR. DHARMESH JUREMALANI, G.C Patel Institute of architecture, Interior Design and Fine Arts, VNSGU-Surat (Gujarat)

TEJAS PANDYA, ASSISTANT PROFESSOR, DEPARTMENT OF CIVIL ENGINEERING, PARUL UNIVERSITY

Abstract: Stone Sand is a waste material found from stone crusher industries. It has properties for use as partial substitute of Coarse Aggregates in concrete. Use of stone sand in concrete not only improves the quality of concrete but also preserve the fine aggregates for future. Both solid and slurry waste are generated in the stone industry. The concrete industry actively finds additional material with the goal of reducing the problem of solid waste disposal. Fine aggregates are substituted with stone sand in this study. The analysis was carried out for M30 quality concrete, substituting coarse aggregates by: 0%, 10%, 20%, 30%, 40% and 50% for stone sand to assess the best percentage for optimal compression strength and workability.

Keywords: concrete, compressive strength, M 30 Grade, replacement, stone sand, workability.

I. INTRODUCTION

Aggregates are most important element in concrete that are usually present in natural form. Concrete is a combination of cement, fine aggregate, coarse aggregate and water. At present construction industry is growing exponentially due to several other factors besides increasing developmental activities. This results in huge demand of construction materials. Concrete is generally used for structural construction. Aggregates are most important element in concrete that are usually present in natural form. The naturally available source of coarse aggregate is limited as such conservation of the same is inevitable. Going for alternative and supplementary material which can be utilized as partial or full replacement of conventional material can play a vital role in conservation of natural resources. The requirement for Coarse aggregate in the building industry has therefore augmented because of the extensive use of concrete resulting in the decrease of aggregates sources. The depletion of natural aggregates generates also the environmental difficulty for example erosion and breakdown of river banks, lowering of river beds into the land. Thus an experimental investigation is required to recognize appropriate replacement that is environmental friendly, economical and superior for strength and durability performance. Stone chips are an industrial waste formed from stone industries for utilization in numerous construction applications in India. The amount of Stone chips waste generated due to the cutting is increasing every day; this put pressure on the limited number of land fill and suggests more sustainable use of such in construction development and in production of new products like concrete. The utilization of Stone chips as coarse aggregate in concrete manufacturing the quantity of natural aggregate essential. This shifts mining method of natural aggregate, an actively costly and environmentally difficult procedure, while decreasing both the requirement for land area for extracting resources and amount of industrial waste that must be disposed of. [5]. Use of Stone chips in concrete as combination can save approximately 5% and 4 % the cost of concrete in step with meter cube with O.P.C, for that reason it may be say as low cost concrete and for sustainable development this material can be used in concrete [12]. More research is still needed to see its wider application in concrete especially as fully replacement of natural coarse aggregate. [2].

II. MATERIALS AND METHODS

Materials

The materials used in the projects for making concrete mixture are cement, Fine aggregate, coarse aggregate, Stone Sand, are detailed describe below:

Cement: The cement used in this experimental investigation was OPC 43 grade and Properties of OPC Cement are as listed below in table 1.

Table 1: Testing on Cement

S. No.	Properties	Result values
1.	Standard consistency %	33%
2.	Initial setting time	45 min
3.	Final setting time	300 min
4.	Specific gravity	3.15
5.	Fineness	2%

Fine aggregates: Fine aggregate (FA) used in this investigation was the natural river sand, passing completely through 4.75 mm aperture size sieve and conforming to zone II as stated by IS:383-1970 specification. Properties of Fine aggregates are listed below in table 2.

Table 2: Properties of Fine Aggregates

S. No.	Test	Result
1.	Zone	II
2.	Specific gravity	2.5
3.	Fineness Modulus	3.76
4.	Water Absorption	0.59%

Coarse Aggregate: Coarse aggregate is a substitute of concrete mixture used for building concrete material. They can be within the variety of unequal broken stone or naturally occurring gravel. Materials that are large to be maintained on 4.75mm sieve size are named coarse aggregates. Its highest size shall be up to 20 mm. Properties of coarse aggregates are explained in table 3.

Table 3: Test of Coarse Aggregates

S. No.	Test	Result
1.	Water absorption	0.40%
2.	Specific gravity	2.94
3.	Fineness Modulus	7.07

Water: Potable water was used for mixing the concrete mix in entire investigation and for curing the concrete in the determination of the optimal percentage of stone chips as coarse aggregate replacement.

Stone Sand: Crushed Stone sand are produced from stone cutting waste by crushing by machine or hammering and separation of predominant size by IS sieve. Stone waste such as byproducts of cutting process of the sand stone from the various stone industries etc. Properties of Crushed Stone sand are described in Table 4.

Table 4: Properties of Stone Sand

S. No.	Test	Result
1.	Type	Crushed
2.	Specific gravity	2.8
3.	Maximum size	2.5 mm
4.	Total water absorption	0.3 %
5.	Fineness Modulus	Crushed

Mix Proportions: Mixture ingredients used for concrete and concluded with their relative amount with the objective of manufacturing a concrete of the desired strength, durability as reasonably as possible is termed concrete mix design. Table 5 explained the mix proportion of concrete.

Table 5: Mix Proportions of Concrete Mix

Percentage Crushed stone sand	Weight of Cement (kg/m ³)	Weight of F.A. (kg/m ³)	Weight of Crushed Stone Sand (kg/m ³)	Weight of Water (kg/m ³)	Weight of C.A. (kg/m ³)
0%	362.5	647.5	0	145	1414.14
10%	362.5	582.75	64.75	145	1414.14
20%	362.5	518	129.5	145	1414.14
30%	362.5	453.25	194.25	145	1414.14
40%	362.5	388.5	259	145	1414.14
50%	362.5	323.75	323.75	145	1414.14

III. EXPERIMENTAL PROCEDURE

The evaluation of concrete with stone chips used as replacement of coarse aggregate materials is finished all through concrete specimen testing. Concrete include cement, water, F.A., C.A. & Stone Sand. Concrete is replaced with alternative materials by varying percentage of replacement. The waste sand of crushed stone is used as partial substitution for fine aggregates in the range of 0%, 10%, 20%, 30%, 40% and 50% as per its weight and its optimum level is to be found. For analyzing the stone sand of normal and other variation mix cubes of size 150x150x150mm were casted for compression strength test. Then dimensions beam 700x100x100mm is designed for flexural strength optimization. Once 24 hours finished from casting the concrete specimens are opened and allowed for continuous curing in a tank with portable water. The specimen is taken and tested at required 7th day & 28th day from curing for compression test and flexural test at 28th day from curing. Then compare the Strengths of M30 design mixes with control cubes.

IV. RESULTS AND ANALYSIS

In this analysis the casted cubes of concrete are analyzed under various examinations to estimate the strength and other properties of the casted concrete cubes. The primary intention of the investigation is to optimize the established strength achieved by the concrete at several testing days from curing. Usually appropriate production and curing of concrete cubes will enhance the strength of the concrete. For this investigation separately test is performed with 3 samples for every mix ratio and tested at required curing days. Then the average values are used for the analysis. Details of performed experiments are explained below:

Slump Cone Test: This experiment is executed to confirm the workability of newly casted concrete. This test independently executed on newly casted concrete and the stone Sand replacing with Natural coarse aggregates to find the workability. The slump is very valuable in identifying variations in the consistency of a mix of given nominal proportions; it is a measure of consistency of the fresh concrete. This test is conducted immediately after the concrete has been made. Table 4.1 shows slump values of concrete mix.

Table 6: Slump value of Concrete Mix

% Replacement	Slump Value (mm)
0%	93
10%	92
20%	92
30%	91
40%	89
50%	88

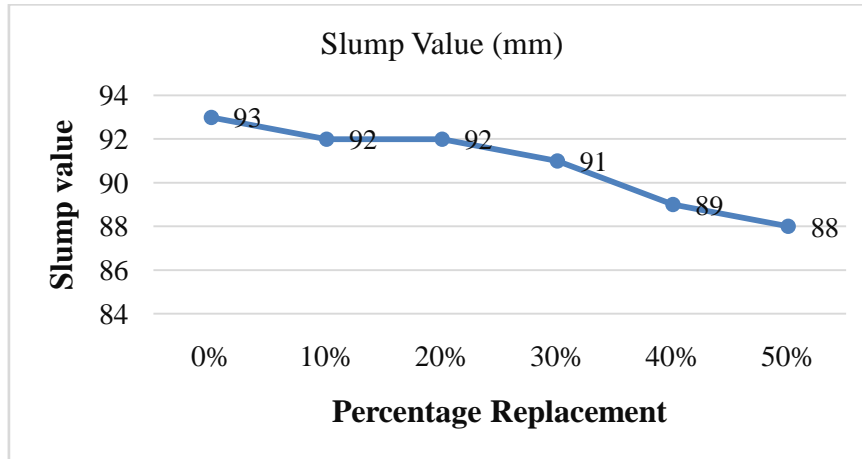


Figure 1: Slump Test values

Compressive Strength Test

Concrete is weak in tension and strong in compression so the concrete should be strong to attain high compression. In this study for each mix 3-samples were tested and the average strength is compared with nominal mix of M30 Mix. Compressive strength test finds out the high amount of compressive load a material can bear below failure limit. The results of compressive strength at the age 7th day & 28th day are shown in Table 7 and Figure 2.

Table 7: Compressive Strength on Concrete M30 Cubes

Percentage Replacement of Stone sand	Compressive Strength (N/mm ²)	
	7 Days	28 Days
0%	36.28	50.99
10%	40.61	54.33
20%	39.66	52.88
30%	36.35	51.32
40%	37.88	48.6
50%	35.99	46.81

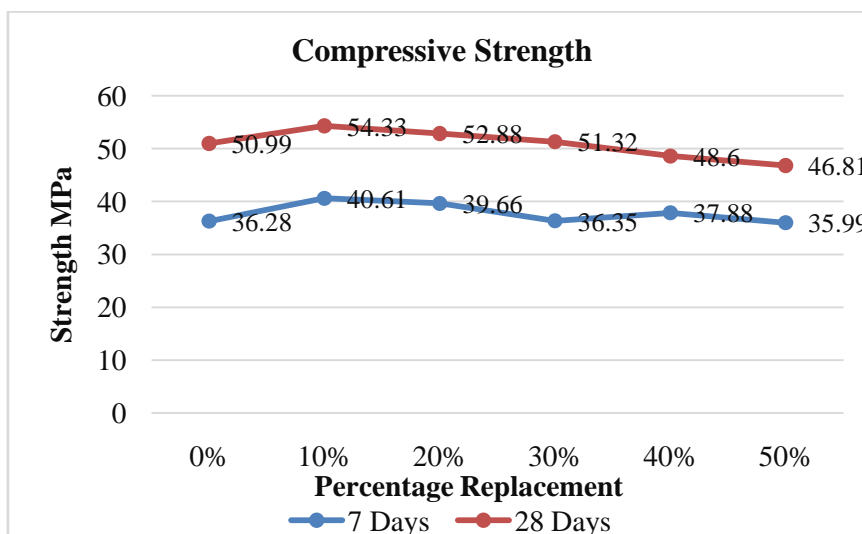


Figure.2: Compressive Strength of Concrete M30

Flexural strength

Flexural strength also called as modulus of rupture. In concrete flexure is the bending moment caused by the applied load, in which a concrete beam has compression at top and tensile stress at the bottom side. Beams on testing will fail in tension due to its property and shear will appear on concrete. In this experimental works totally 6-beams of size 700 x 100 x 100 mm are casted of M30 design mix concrete and other percentage of replacements as for 0%, 10%, 20%, 30%, 40% and 50% by weight of stone sand with coarse aggregates. Then compare the values of both design mixes. The flexural values of various mixes are displayed in Table.8 and Figure 3.

Table.8: Flexural Strength of Concrete at 28 days

Percentage Replacement of Stone Sand	Flexural Strength (N/mm ²)
	M-30
0%	6.83
10%	6.96
20%	5
30%	4.5
40%	4
50%	3.8

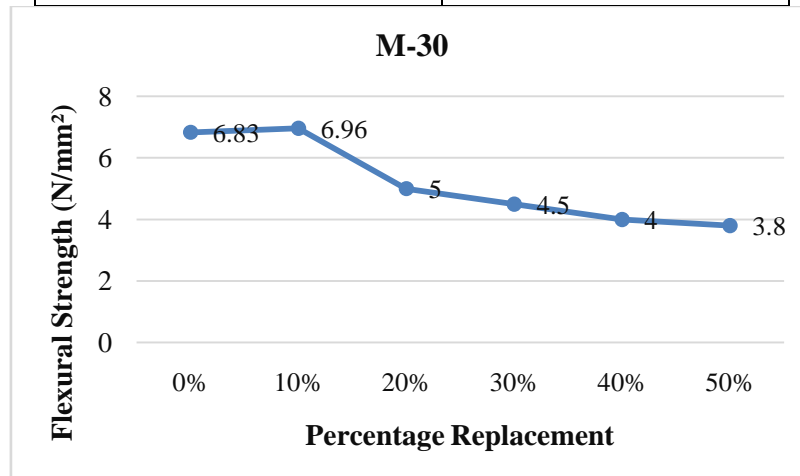


Figure.3: Flexural Strength at 28 Days

V. CONCLUSION

This Study will present a conclusion outlining the main findings as well as possible recommendations for further research. This research has helped to identify factor causes of Stone Sand replacement with fine aggregates in concrete.

1. A Stone Sand is a type of waste used as a substitute to fine aggregate in concrete.
2. For 1m³ M-30 grade of concrete 647.5 Kg fine aggregates is required. Replacement of fine aggregates by 10%, 20%, 30%, 40% and 50% by weight is done. As per experimental results, Maximum compression strength is obtained for 30% stone sand replacement.
3. It reduces the depletion of conventional fine aggregates and also enables to produce green concrete.
4. As Stone Sand is used in concrete, it reduces use of natural aggregate which reduces mining to extract natural aggregate, which results in reduced environmental contamination.

REFERENCES:

- [1] A Sattainathan Sharma, N. Vinoth Kumar, J. Harish and A. Sathish, "Utilization of Granite Chips as a Supplementary Coarse Aggregate Material", Vol. 9, January 2016.
- [2] A Gopalsamy, V.Saranya, P. Shanmuga priya, "Experimental Study On Cement Concrete Flooring Tiles Using Industrial By products", SSRG International journal of civil Engineering, 2017.
- [3] Akshay C. Sankh, Praveen M. Biradar, . J Naghathan, Manjunath B. Ishwargol, "Recent Trends in Replacement of Natural Sand with Different Alternatives", IOSR Journal of Mechanical and Civil Engineering, 2014.
- [4] Amit Kumar Singh, Vikas Srivastava, V.C. Agarwal, "Stone dust in concrete effect on compressive strength", International Journal of Engineering and Technical Research (IJETR) ,Volume-3, Issue-8, August 2015.
- [5] Ashish B. Ghogare, P. P. Saklecha, "analysis and checking of stone dust as a replacement material of sand", international journal of pure and applied research in engineering and technology, Volume 3, 2015.
- [6] Athulya Sugathan, "Investigation on compressive strength of concrete utilizing broken marble tiles as coarse aggregate", International Research Journal of Engineering and Technology (IRJET), e-ISSN: 2395 -0056, Volume: 03, Issue: 05, May-2016.
- [7] B Balapgol, S A Kulkarni, K M Bajoria, "Strength and durability of concrete with crushed sand", 27th Conference on our world in concrete & structures, 30 August 2002.
- [8] H. M. A. Mahzuz, A. A. M. Ahmed, M. A. Yusuf, "Use of stone powder in concrete and mortar as an alternative of sand", African Journal of Environmental Science and Technology Vol. 5(5), pp. 381-388, May 2011.
- [9] **IS 10262:2009** "Guidelines for concrete mix proportioning"
- [10] **IS 456:2000** "Code of practice for plain and reinforced concrete"
- [11] Janarthanan R, Radha Srinivasan, Muthu Mariappan P, "Effective Utilization of Ceramic Waste as a Raw Material in Concrete", International Journal for Scientific Research & Development, Vol. 3, Issue 01, 2015.
- [12] Jay P. Chotaliya, Kuldip B. Makwana, Pratik D. Tank, "Waste Marble Chips As Concrete Aggregate", IJEDR, Volume 4, Issue 3, 2016.
- [13] K.G. Hiraskar, Chetan Patil, "Use of Blast Furnace Slag Aggregate in Concrete", International Journal of Scientific & Engineering Research, Volume 4, Issue 5, May 2013.
- [14] Lakshmi Kumar Minapu, M K M V Ratnam, Dr. U Rangaraju, "Experimental Study on Light Weight Aggregate Concrete with Pumice Stone, Silica Fume and Fly Ash as a Partial Replacement of Coarse Aggregate", International Journal of Innovative Research in Science, Engineering and Technology, Vol. 3, Issue 12, December 2014.
- [15] M. A. Qurishee, I. T. Iqbal, M. S. Islam , M. M. Islam, "Use Of Slag As Coarse Aggregate And Its Effect On Mechanical Properties Of Concrete", 3rd International Conference on Advances in Civil Engineering, 21-23 December 2016.
- [16] M. J. Islam1, S. A. Shafian, N. Sarwar, "Replacemnt of traditional coarse aggregate", 3rd International Conference on Advances in Civil Engineering, 21-23 December 2016.
- [17] M. K. Khan, Bhanu Pratap Singh, "Used Of Recycled Tyre/Rubber as Course Aggregate and Stone Dust As Fine Aggregate in Cement Concrete Works", IOSR Journal of Mechanical and Civil Engineering, Volume 12, Issue 5, Oct. 2015.
- [18] M. M. A. Siddiqui, "Study Of Rubber Aggregates In Concrete An Experimental Investigation", International Journal of Latest Research in Engineering and Technology (IJLRET), Volume 02, Issue 12, December 2016.